

905 LT

905 C



905 LT

905 LT

905 C

905 LT


PROFILE SCALES
HORIZ: 1" = 40'
VERT: 1" = 4'

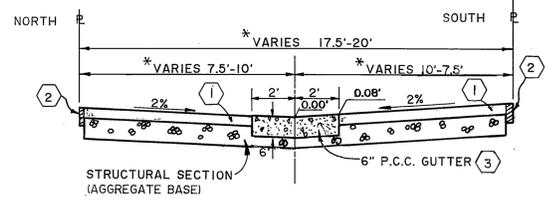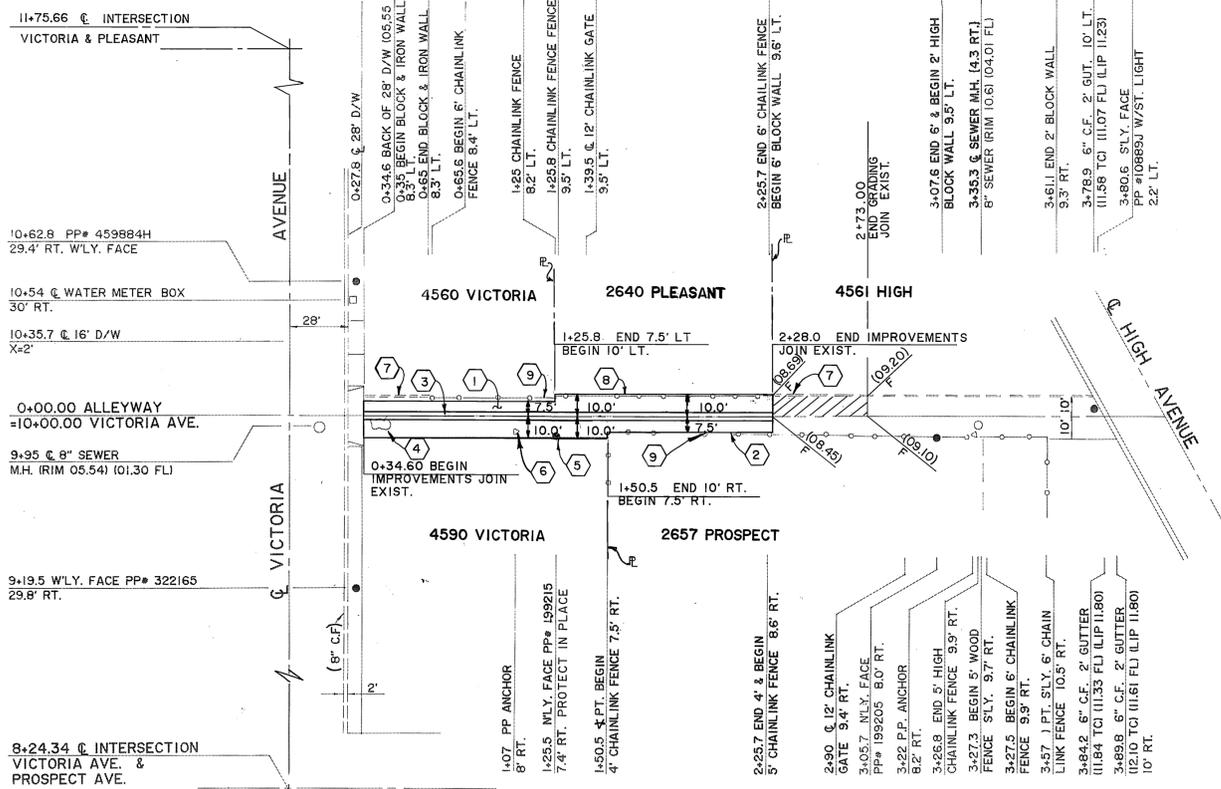

TYPICAL SECTION ALLEYWAY N.T.S.

T.I. = 5 R = 5 CONST. 2.5 A.C. OVER 14" CRUSHED A.B. R VALUE PER S.R. 67

Table with 3 columns: STA. LIMITS, N'LY E.P., S'LY E.P. showing stationing and elevations.

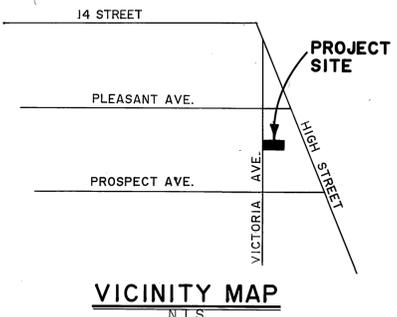

VICINITY MAP N.T.S.

GENERAL NOTES

- 1. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO CLEAR THE RIGHT OF WAY IN ACCORDANCE WITH THE PROVISIONS OF THE LAW AS IT AFFECTS EACH UTILITY INCLUDING IRRIGATION LINES AND APPURTENANCES AND AT NO COST TO THE CITY.
- 2. CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE CITY OF RIVERSIDE DEPARTMENT OF PUBLIC WORKS, STANDARD DRAWINGS, STANDARD DRAWING No. 10 AND THE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, CURRENT EDITION.
- 3. THE PRIVATE ENGINEER SIGNING THESE PLANS IS RESPONSIBLE FOR ASSURING THE ACCURACY AND ACCEPTABILITY OF THE WORK HEREON. IN THE EVENT OF DISCREPANCIES ARISING DURING CONSTRUCTION, THE PRIVATE ENGINEER SHALL BE RESPONSIBLE FOR DETERMINING AN ACCEPTABLE SOLUTION AND REVISING THE PLANS FOR APPROVAL BY THE CITY.
- 4. QUANTITIES SHOWN ARE FOR INFORMATION ONLY AND THE CITY OF RIVERSIDE IS NOT RESPONSIBLE FOR THEIR ACCURACY.
- 5. THE DEVELOPER SHALL BE RESPONSIBLE FOR PRESERVING OR RE-ESTABLISHING AND REFERENCING SURVEY MONUMENTS DESTROYED, DISTURBED OR BURIED AS A RESULT OF CONSTRUCTION SHOWN HEREON.
- 6. ALL FLAGGED ELEVATIONS SHALL BE STAKED IN THE FIELD BY THE PRIVATE ENGINEER.
- 7. THE CONTRACTOR SHALL CALL IN A LOCATION REQUEST TO UNDERGROUND SERVICE ALERT (USA), PHONE No. 1-800-422-4133, TWO WORKING DAYS BEFORE DIGGING. NO CONSTRUCTION PERMIT WILL BE ISSUE BY THE PUBLIC WORKS DEPARTMENT INVOLVING EXCAVATION FOR UNDERGROUND FACILITIES UNLESS THE APPLICANT HAS BEEN PROVIDED AN INQUIRY IDENTIFICATION NUMBER BY U.S.A.

CONSTRUCTION NOTES

- 1. CONSTRUCT 2 1/2" AC PAVEMENT OVER 14" CRUSHED AGGREGATE BASE PER CITY OF RIVERSIDE STD. DWG. No. 110. TYPE 1, R=5, T.I.=5.
- 2. CONSTRUCT 2"x4" REDWOOD HEADER PER TYPICAL SECTION.
- 3. CONSTRUCT 6" P.C.C. GUTTER PER TYPICAL SECTION.
- 4. SHRUBBERY TO BE REMOVED.
- 5. POWER POLE PROTECT IN PLACE.
- 6. POWER POLE ANCHOR RELOCATE BY CITY FORCES.
- 7. BLOCK & IRON WALL, BLOCK WALL PROTECT IN PLACE.
- 8. CHAINLINK FENCE TO BE RELOCATED.
- 9. CHAINLINK FENCE PROTECT IN PLACE.

QUANTITIES

Table with 3 columns: Item number, Description, and Quantity. Includes items for pavement, gutter, shrubbery, power poles, block walls, and chainlink fence.

ALLEYWAY IMPROVEMENTS

Underground Service Alert logo and contact information: Call: TOLL FREE 1-800 422-4133

PRIVATE ENGINEERING NOTE: CONSTRUCTION CONTRACTOR AGREES THAT IN ACCORDANCE WITH GENERALLY ACCEPTED CONSTRUCTION PRACTICES...



PREPARED UNDER THE DIRECTION OF: J.F. Davidson Associates, Inc. REGISTERED CIVIL ENGINEER No. 35165

J.F. Davidson Associates, Inc. logo and address information: 3880 Lemon Street, Suite 300, Palm Desert, CA 92260

Table with columns: MARK, REVISIONS, APPR, DATE. Includes a signature and date for J.D.S.

CITY OF RIVERSIDE ELECTRIC OVERHEAD AND UNDERGROUND. DATE: 5/25/89. Bill Amata, CHIEF UTILITIES ENGINEERING-ELECTRIC

CITY OF RIVERSIDE, CALIFORNIA DEPARTMENT OF PUBLIC WORKS. APPROVED BY: Barry Bell, DIRECTOR OF PUBLIC WORKS. DATE: 6/27/89

IN THE CITY OF RIVERSIDE. PROJECT NO. R-3069. ALLEY IMPROVEMENTS. BETWEEN VICTORIA AVE. & HIGH AVE. SOUTH OF PLEASANT AVE. FOR BUILDING PERMIT AT 2640 PLEASANT. SHEET 1 OF 1. HORIZ. SCALE: 1" = 40'. VERT. SCALE: 1" = 4'. FILE NO.: 8911053 (M)

INDEXED 8-10-89 LH